

This guide describes the steps necessary to configure NetLogger and copy your basic contact data from the N7XG logger to NetLogger.


Requirements: This guide is for use ONLY with N7XG Logger version 5.01.15 or higher; and NetLogger version 3.1.5 or higher.

Important: If you are currently running NetLogger 3.0.3 or older, be sure to upgrade to the newest version of NetLogger before continuing. Certain features described in this manual will not function as expected until you have upgraded.


- A. If you are currently using NetLogger for any other nets, be sure to save your existing NetLogger logged contacts before continuing. You may use the NetLogger File->Export->To ADIF File menu item to save existing contacts.

Note: If you have contacts logged in the N7XG Logger, and you would like to transfer them to NetLogger, proceed with Section B. If no contacts to transfer, skip to Section C.


- B. Start the N7XG Logger. Create a CSV (comma separated) text file containing your logged contact data stored in the N7XG logger. Perform the following steps:
- a. To begin, open the N7XG logger and select 'Export Contact Data' from the File menu.

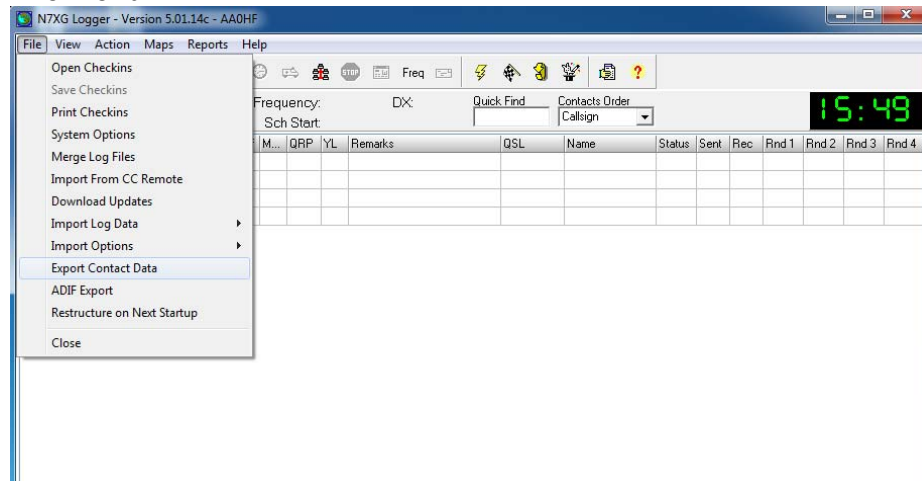


- b. Step 1: You will see the Export Wizard window. Select 'Text file (*.txt)'. Press 'Next' to continue.

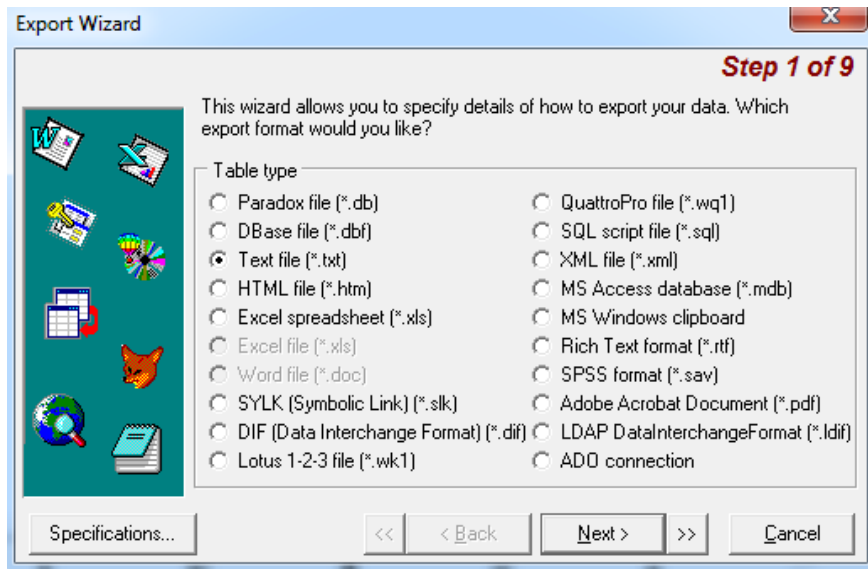


- c. Step 2: You will see the Step 2 Export Wizard window. Choose File Origin of 'ANSI (Windows)', and check the 'Include column titles' and 'export the original value types' boxes. Press 'Next' to continue:

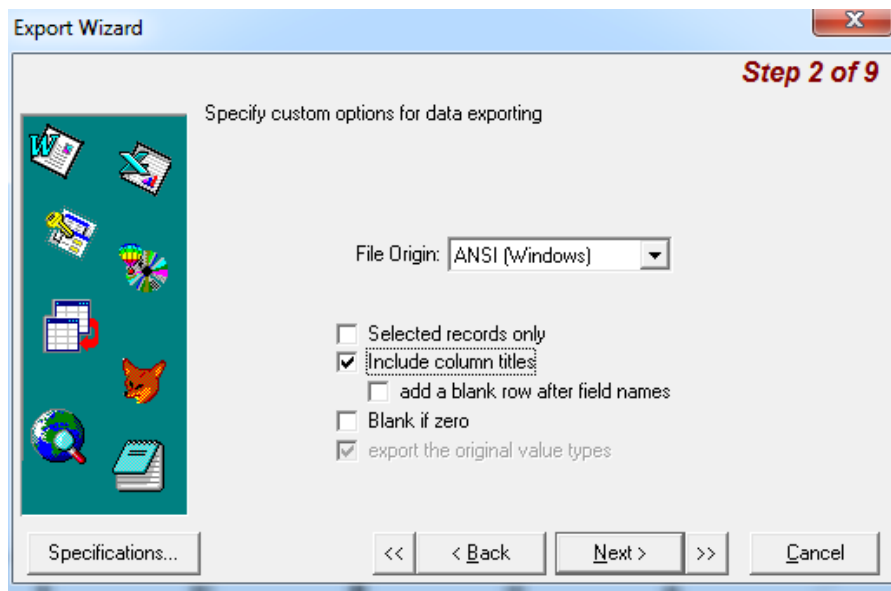

- d. Step 3: You will see the Step 3 Export Wizard window. Check 'Delimited' option'. Select 'Comma' as field delimiter, 'CRLF' as Record separator and " (double quotes) as Text qualifier. Press 'Next' to continue.

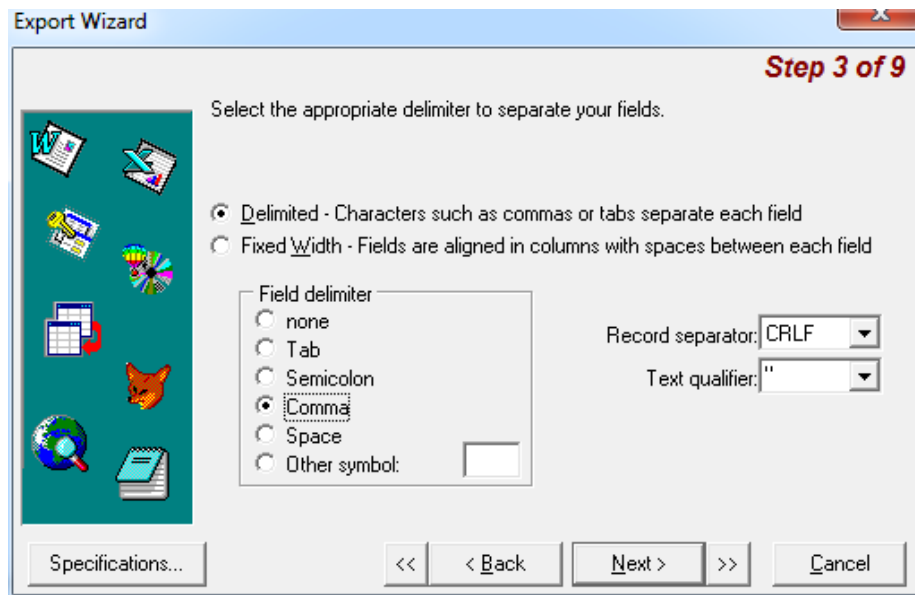

- e. Step 4: You will see the Step 4 Export Wizard window. Generally, there should be no changes required on this window. Compare your screen to the following picture and make sure they match. Press 'Next' to continue.

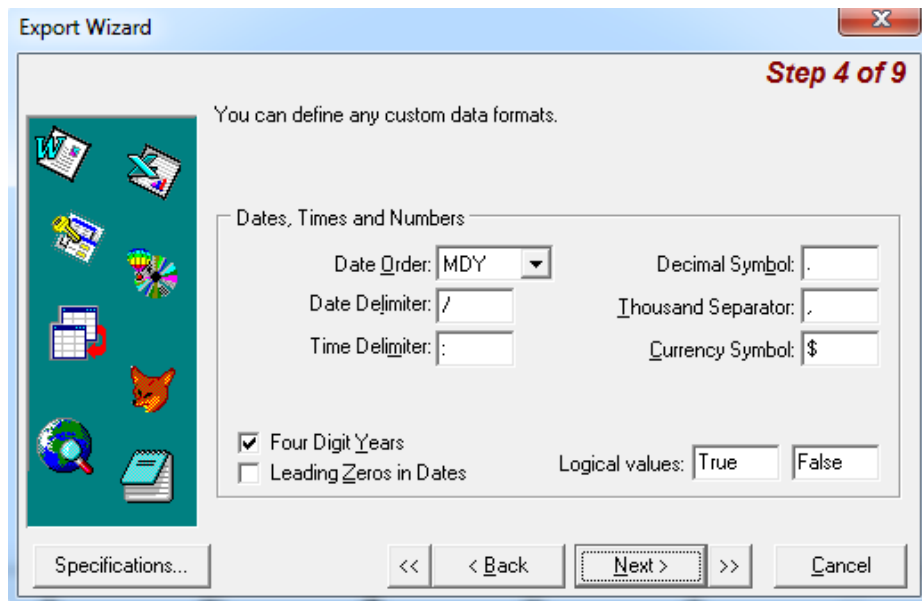


- f. Step 5: You will see the Step 5 Export Wizard window. Carefully select ALL the exported columns in the scrolling box on the left. Start with Callsign and scroll down to QSLInfo. ALL FIELDS MUST BE SELECTED FOR EXPORT.


Note: Exported columns must appear in the following order only.
If they are not, drag and drop them to the correct positions:

Callsign
 Mobile
 State
 Date
 Time
 Band
 Frequency
 Mode
 His_RST
 My_RST
 Sent
 Rec
 Name
 City
 Remarks
 NetName
 StateCap
 MasterHolder
 YL
 Mycall
 OpState
 OpMode
 OpLocation
 QSLInfo


Go back and confirm the field names are in the above order and that every box on the list is checked. Confirm the Title and Data sections match the following picture. Press 'Next' to continue.

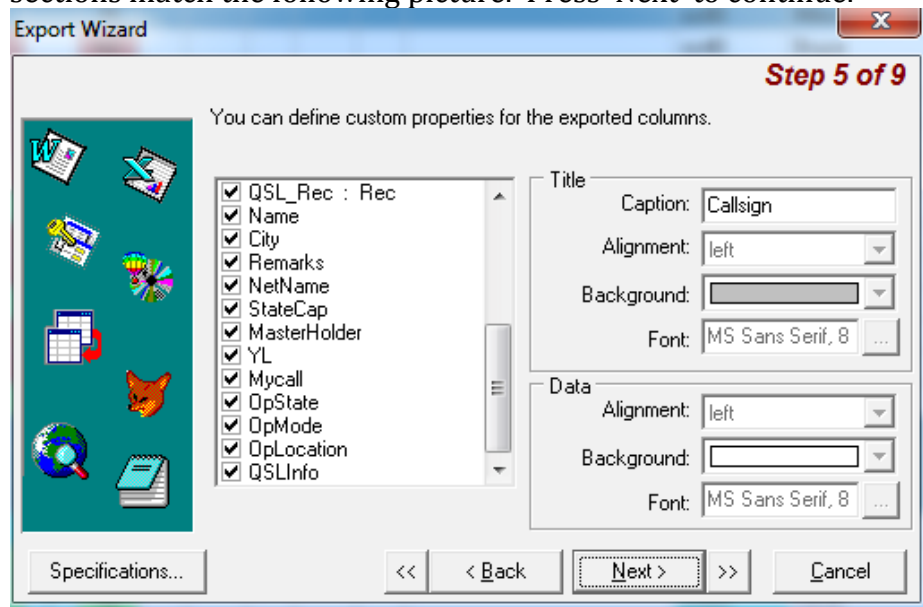


- g. Step 6: You will see the Step 6 Export Wizard window. Leave the Header and Footer fields blank. Press 'Next' to continue.

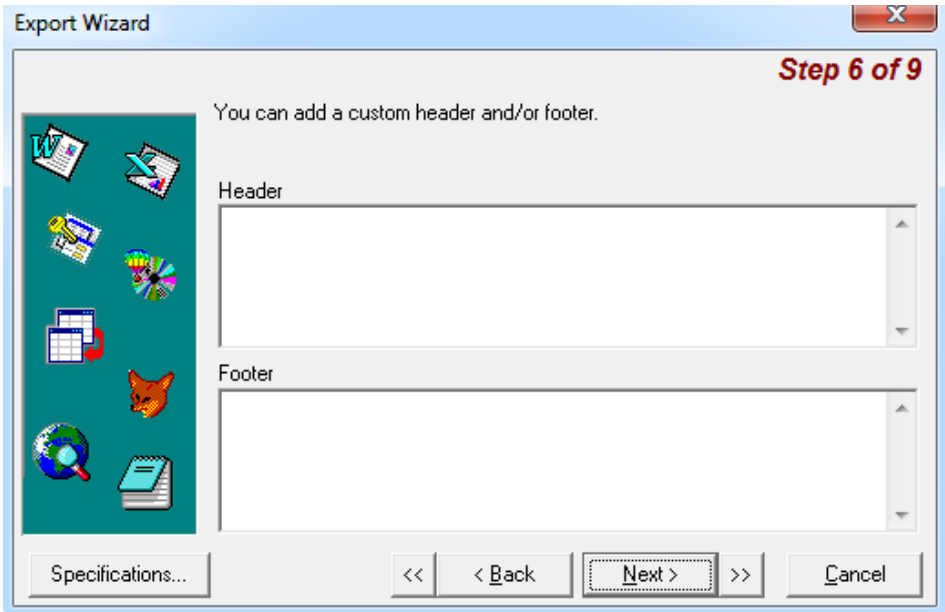


- h. Step 8: You will see the Step 8 Export Wizard window. (There is no step 7). No changes should be required on this window. Confirm your screen matches the following picture. Press 'Next' to continue.

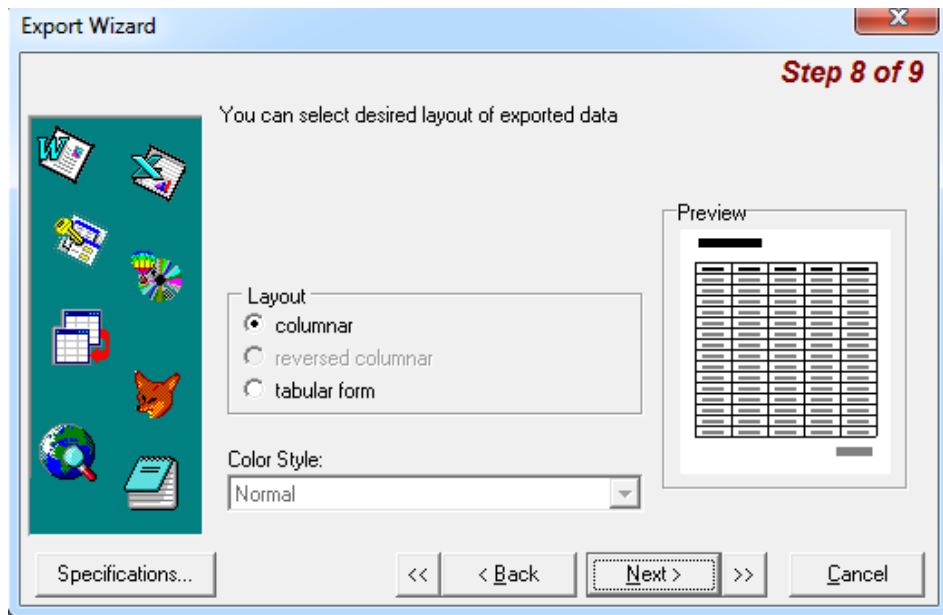

- i. Step 9: You will see the Step 9 Export Wizard window. In the 'Export to a File' field, enter a file location and name on your PC to store the exported log. We suggest saving the log file on your Desktop so you can find it later from NetLogger. You must change the last three letters of the file name from txt to CSV. Confirm the rest of the window matches the following picture. Press 'Execute' to continue.

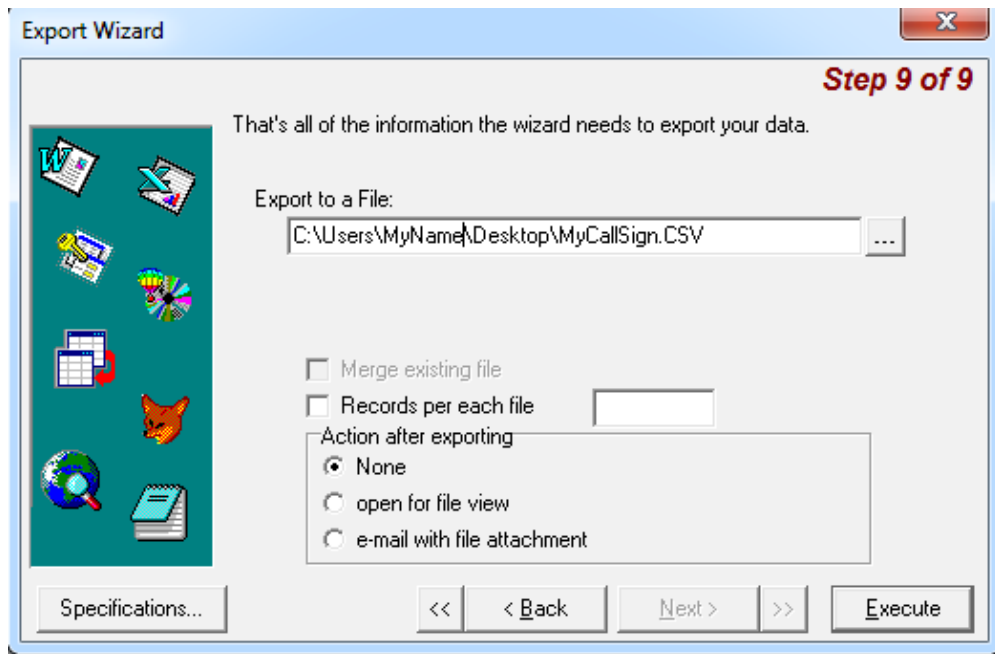

- j. Your contacts will be exported. Confirm your file was created on the Desktop and has a size greater than zero.

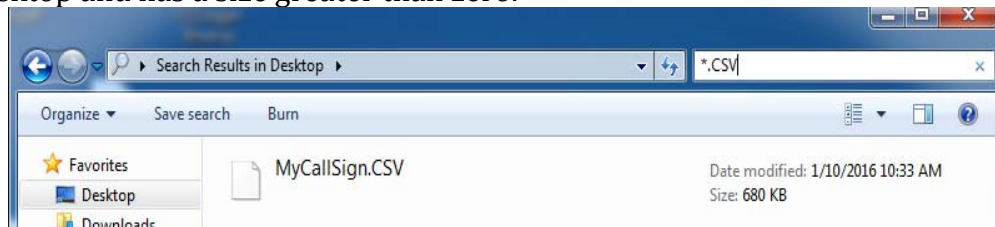

- C. Configure and load NetLogger for the 3905 Century Club.
- If you have not yet done so, download NetLogger 3.1.5 or higher from <http://netlogger.org>. Follow their instructions to install.
 - Start NetLogger.
 - From the NetLogger Setup Menu select 'Change Operator'. Make sure Call Sign is your current call sign, and Name/Other is blank. Press 'Done' to continue.

Set Operator

Call Sign

Name / Other (optional)

Done

- From the NetLogger Setup Menu select 'Accounts'. Configure your QRZ XML, eQSL and LoTW accounts if you have them. Press 'Done' to continue.

Account Setup

QRZ XML Account Setup

QRZ Paid Subscription REQUIRED!

Enable Online QRZ Callbook Lookups

Account

Password

eQSL Account Setup

Use call sign for account name

Account

Ask for password at upload/status time

Password

LoTW Account Setup

Use call sign for account name


Account

Ask for password at status check time


Password

Done

- e. From the NetLogger Setup Menu select 'Worked Stations Flag'. Select all the boxes. Press 'Done' to continue.

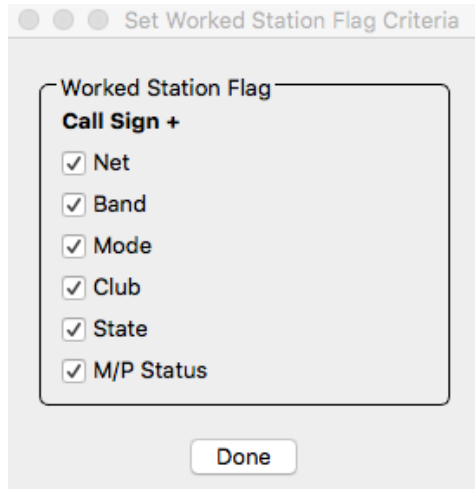


- f. From the NetLogger Setup Menu select 'Club Profile and Callbook Order'. Make sure the window is configured exactly like the following picture. Press 'Done' to continue.

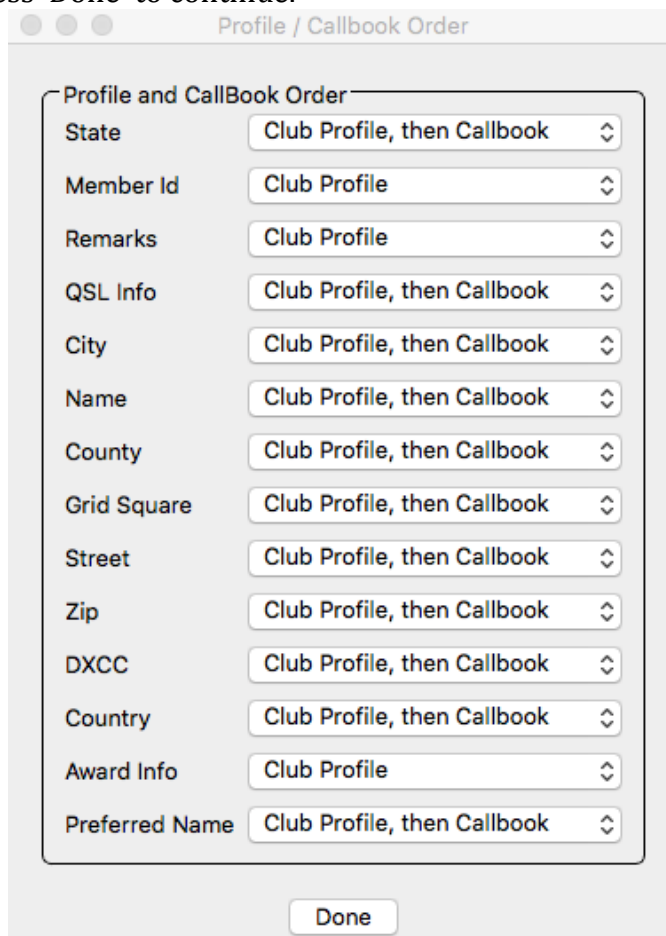

Note: If you completed Section B and would like to load your contacts file into NetLogger, continue with this section. Otherwise, skip to Section D.

- g. From the file menu select 'File', then 'Import Contacts', then 'From CSV File'.

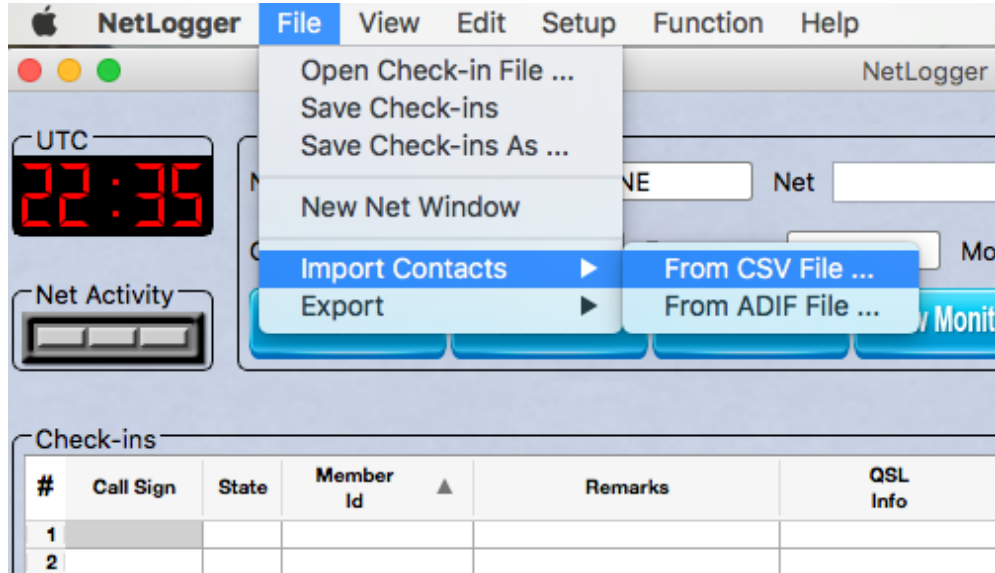

- h. Navigate to the Desktop and select the N7XG CSV file you created in Section B. Press 'Open' to continue.

Your N7XG log file should be imported and visible in the lower Contact section of the screen. When your contacts are imported, the 'Send Conf By' and 'Rcvd Conf By' fields are mapped to NetLogger as follows:

'Sent Conf By' Definition	N7XG	NetLogger
Send a card direct	D	d
Send a card via bureau	N	n
Card mailed	S	C
No card needed	X	N

'Rcvd Conf By' Definition	N7XG	NetLogger
Waiting for card	N	n
Card received	R	C
No card expected	X	x

- D. When it is time for a 3905 Century Club net, press the blue 'Select Net' button and look for your net to select.

***** Your Installation of NetLogger is Complete *****


Optional Setup Items

E. Club Profile Setup. These instructions only needed for:


1. Net Control Stations
2. Stations that plan to use NetLogger in Standalone Mode (not monitoring live nets) to log your 3905 contacts *while not connected to the Internet*, perform the following steps to download a copy of the club profile to auto-fill member details in your contacts.

Note: These instructions are not needed for most members of the 3905 Century Club.

- a. Make sure you have complete steps A through C of these instructions while connected to the Internet.
- b. Remain connected to the Internet for the following steps.
- c. From the NetLogger Setup Menu select 'Club Profile'. The Club Profile Setup window will appear and look something like this.

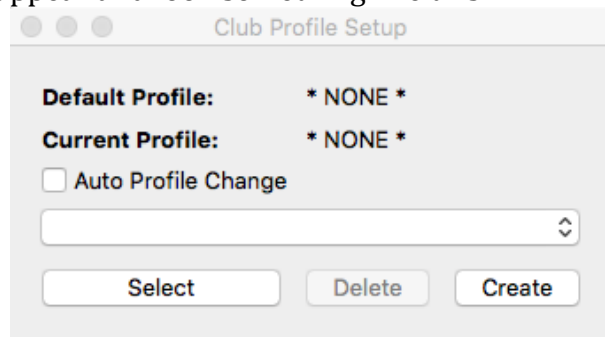

- d. Make sure the 'Auto Profile Change' box is not checked. Then from the pull-down select 3905CCN. Your window should look something like the following picture. Press 'Select' to continue. *Warning: do not press 'Create' or 'Delete'.*

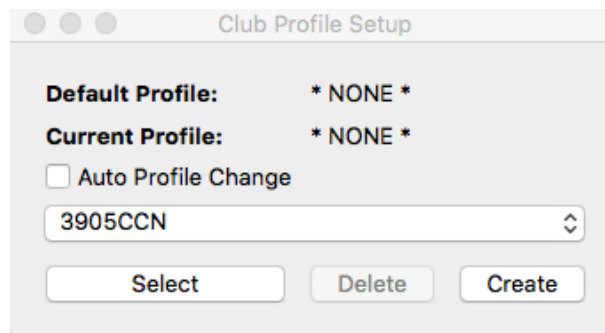

- e. From the NetLogger Function menu select 'Download Latest Club Profile'. If prompted to overwrite your current profile, press 'Yes' to continue.

***** You have successfully configured the Club Profile ******